LED Downlight

Technical Parameters:

Name	Parameters
Light source:	BRIDGELUX LED
Input Voltage:	AC220~240V 50/60Hz
Color Temperature	3000K, 4000K, 5600K
Color of housing	White
Rated life:	>35,000 hours
Beam angle:	20°/40°
Operating temperature:	-20℃~40℃
Storage temperature:	-30℃~60℃
Color rendering index:	82
Certificate:	CE/RoHS
Dimmability:	Dimmable Optional
Cut hole Diameter	180*180mm
Package(mm):	inner box : L210*W210*H185mm outer carton: 430*430*385mm, 8pcs/ carton

Ordering Information:

Part Number	Colour	Lumen Output (lm) typ.	Beam Angle	Power consumption	Current Output
LF-P34W3-1W-BL-S-08	Cool White	2400 lm	20°/40°	34.5W	850mA
LF-P34W5-1W-BL-S-08	Neutral White	2146 lm	20°/40°	34.5W	850mA
LF-P34W6-1W-BL-S-08	Warm White	1800 lm	20°/40°	34.5W	850mA

Outline Dimension:

Unit:mm

180x180

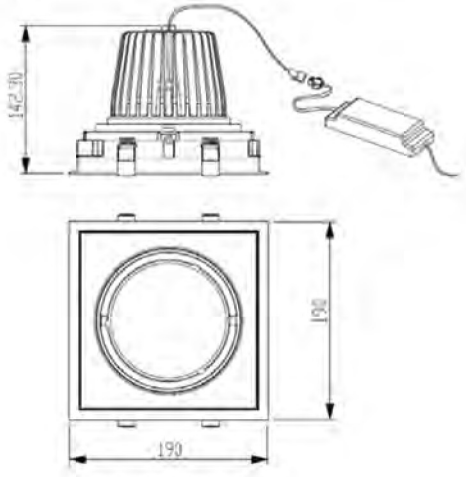

LED Downlight

Adjustable LED recessed downlight

Features and Benefits:

- Energy saving up to 70%
- 20 x longer life than conventional bulbs
- Extremely low maintenance costs
- High quality light
- Optimal heat dissipation design
- Driver excluding
- Short pay-back period less than 1 year
- No heat, UV or infrared in the beam
- No mercury
- Instant start

Application:

- To be accessorial lights for family , commercial palaces, public , fumiture, hotel store, shop window, casino and so on